



SS.濁度計軟體校正

濬創科技有限公司

2018/12/10

林益賢

前置安裝

- ▶ 1.更改地區及語言->英文
- ▶ 2.安裝C_NET

Install C_NET	2018/12/10 上午 ...	檔案資料夾	
Administrator rights V1.5	2018/10/1 下午 0...	Windows 批次檔案	1 KB
Administrator rights V2.8	2018/10/1 下午 0...	Windows 批次檔案	1 KB
Administrator rights V3.4	2018/11/21 下午 ...	Windows 批次檔案	1 KB
Chemitec_IR	2013/9/10 下午 1...	應用程式	109 KB
Chemitec_IR_LI	2017/4/19 下午 1...	應用程式	112 KB
Chemitec_IR2	2017/5/3 下午 01...	應用程式	112 KB

MSVBVM50.dl_	2006/3/2 下午 01...	DL_ 檔案	846 KB
OleAut32.dl_	1997/1/14 下午 1...	DL_ 檔案	316 KB
OlePro32.dl_	1997/1/14 下午 1...	DL_ 檔案	16 KB
SETUP	1997/1/15 下午 1...	應用程式	88 KB
SETUP.LST	2012/12/10 下午 ...	LST 檔案	8 KB
setup1.ex_	1997/1/15 下午 1...	EX_ 檔案	72 KB
ST5UNST.EX_	1997/1/15 下午 1...	EX_ 檔案	37 KB
StdOle2.tl_	1997/1/14 下午 1...	TL_ 檔案	7 KB



版本選用

- ▶ 1.濁度計(S461T)->V1.5
- ▶ 2.SS計(S461S)->V2.8或V3.4

功能說明

連接

中斷

從感測器讀出設定值

將設定值存入感測器

即時值

The screenshot shows the CHEMITEC I.R. - LI. PROBE MANAGER (ver. 1.5 19/04/17) logged as ADMINISTRATOR. The interface includes a menu bar (File, IR.probe, SetUp, Info) and a toolbar with icons for connection, data transfer, and settings. The main area is divided into several sections:

- Measurement Range Table (測量range表單):** A table with columns for N?TABLE, DIGITS, NTU-g/l, and GAIN. It contains four rows of input fields.
- Gain Settings:** Checkboxes for S1 ON, S2 ON, and S3 ON, and a K factor input field.
- Real-time Values (即時值):** A section titled "I.R. Probe Values" containing input fields for NTU, DIGIT (diff.), DIGIT (high), and DIGIT (low), each with an "update" button.
- Configuration:** Input fields for Curr. Table, Filter, Slave ID, and Serial Number, each with an "update" button.
- Display Options:** A "Two decimals" checkbox and radio buttons for "FS Table 4" (1000 NTU and 4000 NTU), each with an "update" button.
- Footer:** A "Solution formazina date" input field and a status bar showing "COM1 9600 ID: 1" and "NOT CONNECTED".


測量range表單

設定Port及ID

離開

測量range表單

設定Port及ID

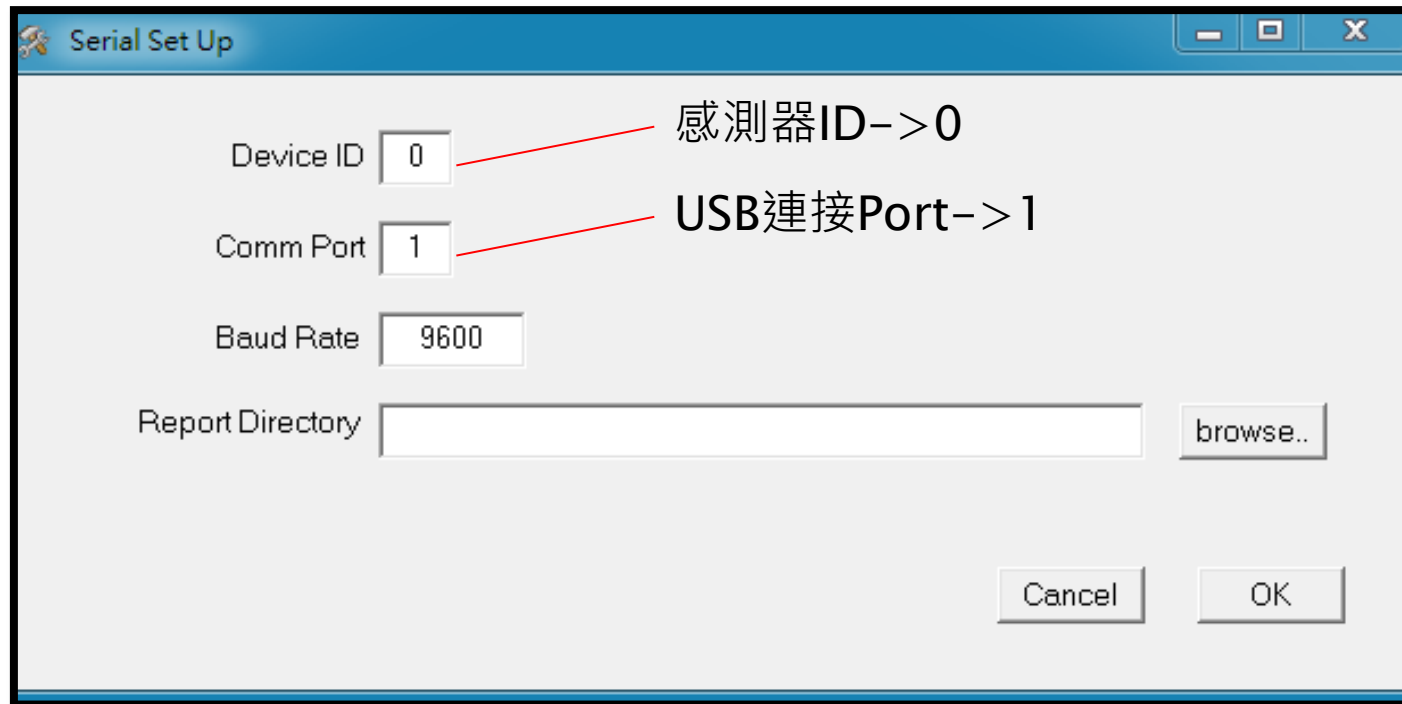

The image shows a 'Serial Set Up' dialog box with the following fields and annotations:

- Device ID:** A text box containing the value '0'. A red line points from the text '感測器ID->0' to this field.
- Comm Port:** A text box containing the value '1'. A red line points from the text 'USB連接Port->1' to this field.
- Baud Rate:** A text box containing the value '9600'.
- Report Directory:** An empty text box with a 'browse..' button to its right.
- Buttons:** 'Cancel' and 'OK' buttons are located at the bottom right of the dialog.

電腦USB Com Port查詢

- ▶ 控制台->裝置管理員->通訊連接埠->連接埠設定->進階->COM1

The image shows two screenshots from a Windows operating system. The left screenshot displays the Device Manager window with the 'Communication ports (COM and LPT)' category expanded, and 'COM1' selected. The right screenshot shows the 'Advanced settings for COM1' dialog box, where the 'COM port number (P):' is set to 'COM1'. The 'Advanced' tab is active, showing settings for baud rate (9600), data bits (8), parity (None), stop bits (1), and flow control (None). The 'Receive buffer size (R):' is set to 14 and the 'Transmit buffer size (T):' is set to 16. The 'Use FIFO buffering' checkbox is checked.

線性校正

- ▶ 1.先”連接”並按左上上的“讀出設定值”
- ▶ 2.確認”左側的表單”及”右側即時值的表單update”一致
- ▶ 3.讀出即時值顯示的Digit(diff.)
- ▶ 4.將Digit值輸入在左側的表單對應NTU(g/l)值
- ▶ 5.最後按左上上的”存入感測器”即完成



簡報結束

Thanks for your attentions!